## FCSCC Large Display Sign Setup – August 2018



The Large Display is stored in a large black case under the bench in the van.

You will need the following items to setup the large Display

- 1) Large Display :>
- 2) Power supply located in the black case
- 3) Ethernet Cable located in the large display
- 4) Speaker stand that holds the PA speakers and the sign
- 5) PA Speakers
- 6) Yellow Spool with extension cord
  - a. The spool end stays at the sign and the plug end runs to the van
  - b. Run the cord first before plugging in the sign power adapter
- 7) Yellow spool with Blue communication cord.
  - a. Ethernet jack on the spool end


- b. A silver db9 connector on the other end
- c. The spool stays at the sign so run the silver DB9 end to the van first before plugging in the Ethernet cord to the sign.



The power adapter plugs into the bottom of the sign.



The Ethernet cable plugs into the jack on the back of the sign.

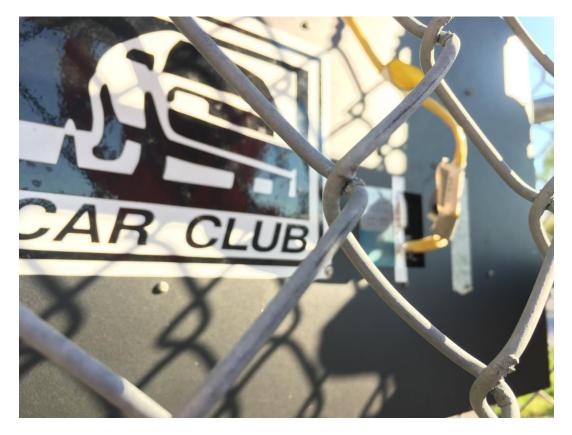

Use bungee cords to secure the stand and sign so it does not get blown down in the wind.

When the sing is plugged in it will run thru a test sequence to show the sign is working.

The sign only displays when the laptop is running.

The PA speakers plug into the long black cord with round connector in the Van.

The round connector has a slide switch on it. Slide the bottom and twist the connector to lock and unlock it.

